


# DC1D QUICK START

**1** Connect power supply, motor and peripherals (See pages 4 and 5)


**2** Power the control panel, the screen will turn on



**3** Enter the menu by pressing **BACK** and **ENTER** simultaneously

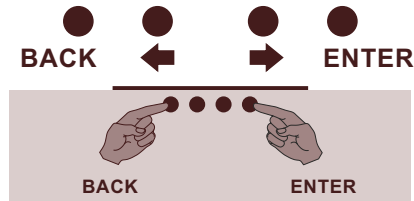


**4** Select door type

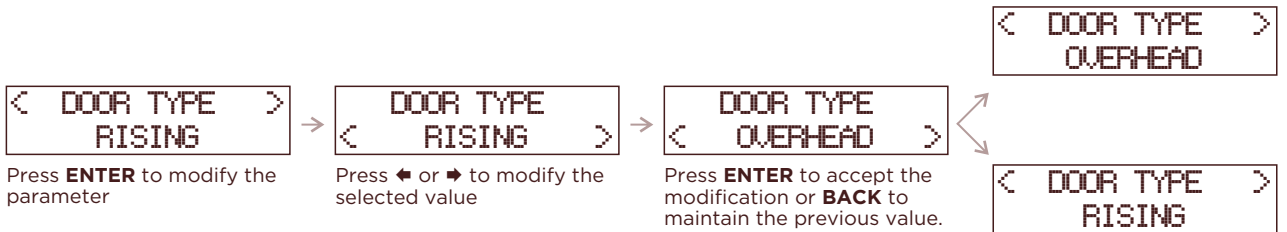

**5** Select the maneuver mode (see page 7)




**6** Test motor operation and adjust limit switches (if any).

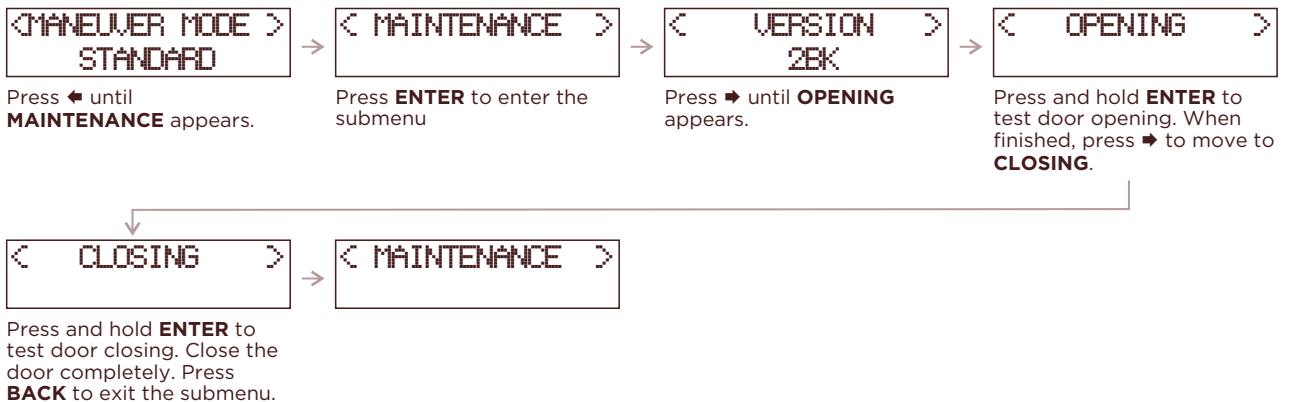

## 7 Perform the maneuver programming procedure. Make sure you have closed the door first.

Do not enter **OPTIONS** and **SETTINGS** menus, not necessary for programming

NOTE: If limit switches are used, mark **YES** in their parameters, and if not, mark **NO**

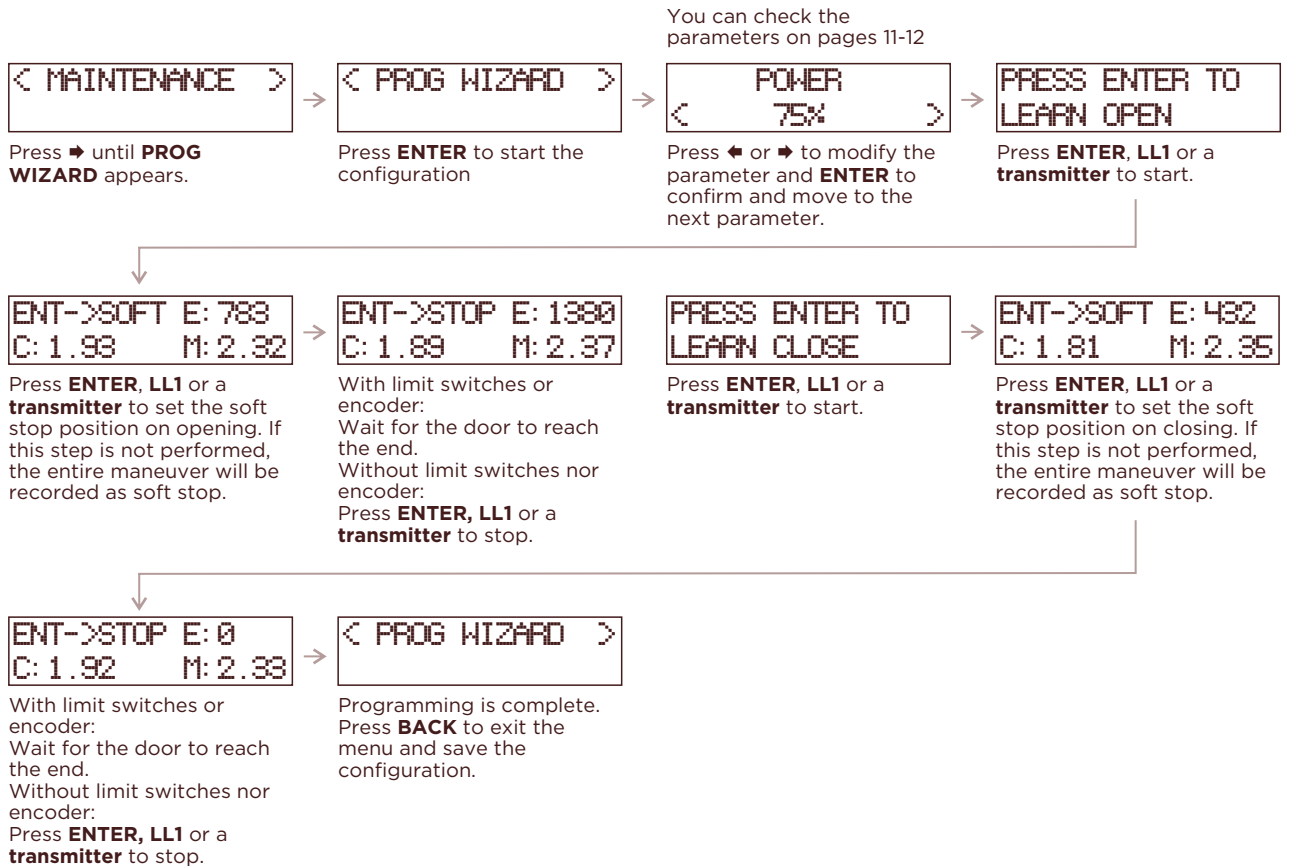

## 8 Test operation and tune **OPTIONS** and **SETTINGS**

Use **LL1, LL2** or a **transmitter** to test the operation of the maneuver. If necessary, modify the corresponding parameters in **OPTIONS** and **SETTINGS**.

SMiNN

innovative in electronics