


MF1D QUICK START

- 1 Connect power supply, motor and peripherals (See pages 4 and 5)




	Motor 1
Common	3
Open	4
Close	5
Cap. (Capacitor)	6 7

If the motor has a built-in capacitor, do not connect anything to the capacitor terminals.


- 2 Power the control panel, the screen will turn on



- 3 Enter the menu by pressing **BACK** and **ENTER** simultaneously

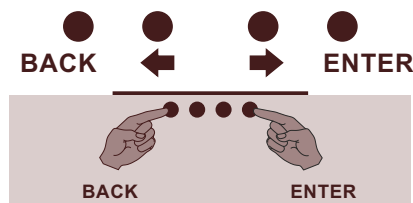


- 4 Select door type

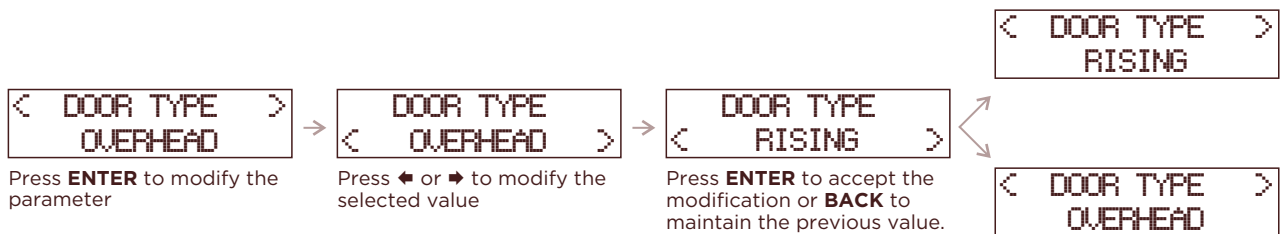

- 5 Select the maneuver mode (see page 7)




6 Test motor operation and adjust limit switches (if any).

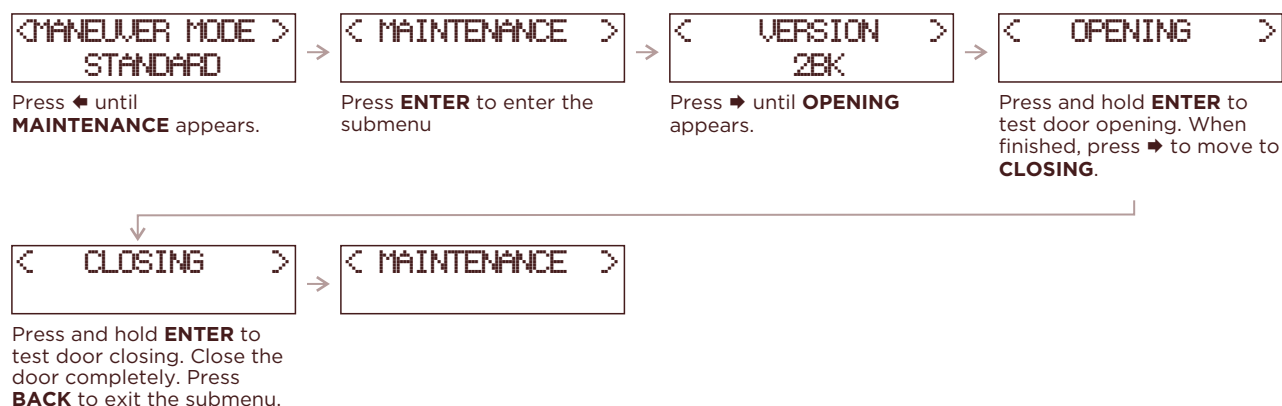

7 Perform the maneuver programming procedure. Make sure you have closed the door first.

Do not enter **OPTIONS** and **SETTINGS** menus, not necessary for programming

NOTE: If limit switches are used, mark **YES** in their parameters, and if not, mark **NO**

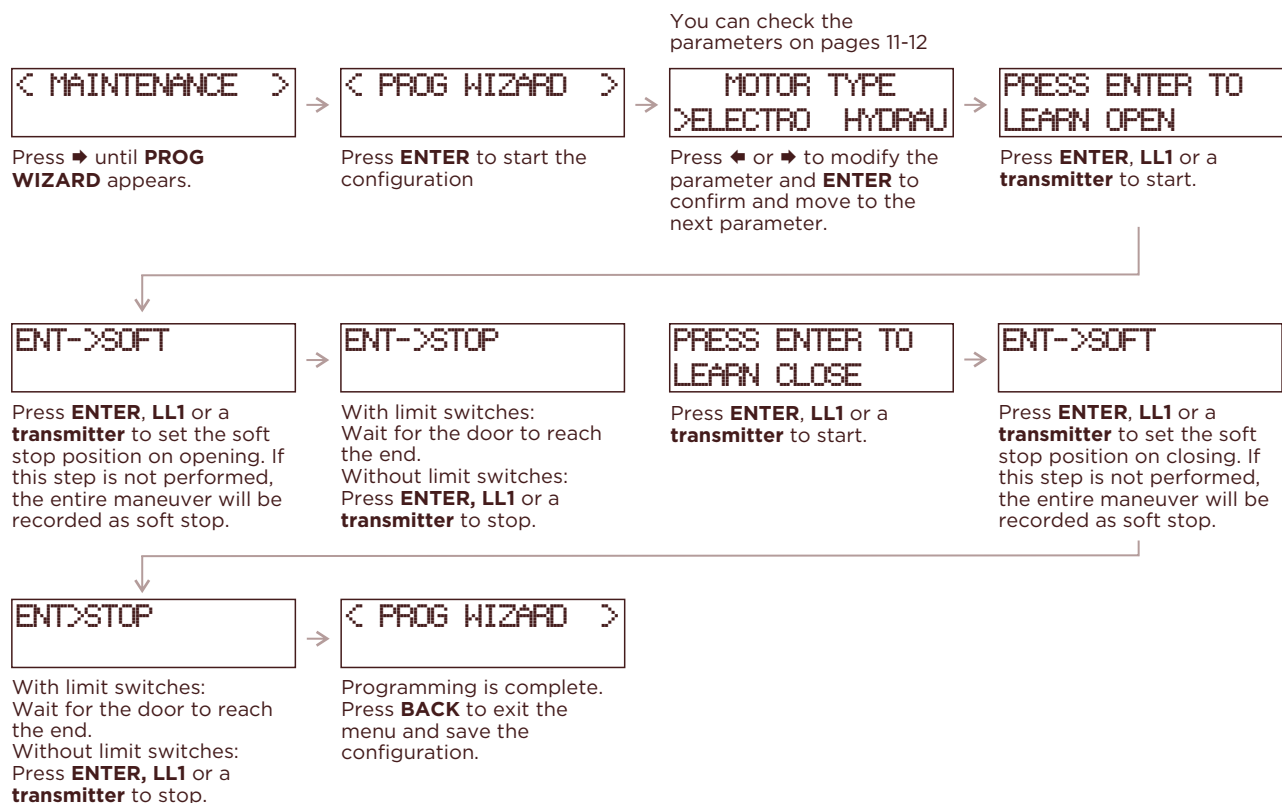

8 Test operation and tune **OPTIONS** and **SETTINGS**

Use **LL1, LL2** or a **transmitter** to test the operation of the maneuver. If necessary, modify the corresponding parameters in **OPTIONS** and **SETTINGS**.